TRUE MANUFACTURING CO., INC © U.S.A. FOODSERVICE DIVISION 2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com	Location: Item #:	Qty:	- 5/5 #
Model: Glass Door Merchandiser:	- Woder #		-
GDM-07-S-HC~TSL01 Swing Door Counter-Top Stainless Steel Refriger	rator with Hydrocarbon I	Refrigerant~True Standard Look	Version 01
<image/>		 GDM-07-S-HC~ The world's #1 manufacturer of merchandisers. True's commitment to using the highest quality materials and refrigeration systems provided with colder product temperation and lower utility costs in an atmerchandiser that brilliantly of packaged food and beverage Designed for convenient accesservice, and attractive display Factory engineered, self-contacapillary tube system using environmentally friendly R290 carbon refrigerant that has zee depletion potential (ODP), & tiglobal warming potential (GW) High capacity, factory balance refrigeration system that main temperatures of 33°F to 38°F if or the best in food preservations who appreciate the value of s Interior - attractive, white alure interior liner with stainless stee Self closing door. Positive seal closure system. "Low-E", double pane thermal glass door assembly with mitter channel frame. The latest in earthcloay. LED interior ling provides lighting throughout the cabir shielded. Entire cabinet structure is foat place using a high density, pod insulation that has zero ozoon potential (ODP) and zero glob potential (GWP). 	of glass door he oversized s the user urres, ttractive displays s. ained, 0 hydro ro (0) ozone hree (3) VP). ed ntains cabinet (.5°C to 3.3°C) ion. teel for those tainless. minum teel floor. I, torsion type insulated ered plastic nergy more even net. Safety med-in- hydroent insulated edepletion

			C	.nart dim	ensions ro	bunaea	up to the nearest 1/8"	millimete	rs rounded	up to next wh	iole number).
			Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	Shelves	L	D†	н	HP	Voltage	Amps	Config.	(total m)	(kg)
GDM-07-S-HC~TSL01	1	3	241⁄8	24%	397⁄8	1⁄6	115/60/1	1.9	5-15P	9	TBD
			613	626	1013	1⁄6	230-240/50/1	1.1		2.74	TBD

† Depth does not include 1%" (42 mm) for door handle. Depth does not include ½" (13 mm) for system mechanical components.

▲ Plug type varies by country.

IN THE USA	APPROVALS:	AVAILABLE AT:
9/21 Printed in U.S.A.		

Model:

GDM-07-S-HC~TSL01 Swing Door Cou

Glass Door Merchandiser:

Swing Door Counter-Top Stainless Steel Refrigerator with Hydrocarbon Refrigerant~True Standard Look Version 01



STANDARD FEATURES

DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.

CABINET CONSTRUCTION

- Exterior gleaming stainless steel for those who appreciate the value of stainless.
- Interior attractive, white aluminum liner with stainless steel floor.

- Insulation entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Cabinet fitted with $2\frac{1}{2}$ " (64 mm) legs.
- Door sign decal. Variety of decal options available.

DOOR

- "Low-E", double pane thermal insulated glass door assembly with mitered plastic channel frame. The latest in energy efficient technology.
- Door fitted with 12" (305 mm) long extruded handle.
- Self closing door. Positive seal, torsion type closure system.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Three (3) adjustable, heavy duty PVC coated wire shelves; two 19¹%6"L x 17"D (501 mm x 432 mm) and one (1) 19¹%6"L x 16¹/₂"D (501 mm x 420 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on ½" (13 mm) increments.

LIGHTING

• LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and decal offerings.
- Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled product.

ELECTRICAL


 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.

115/60/1 NEMA-5-15R

OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.

- 230 240V / 50 Hz.
- 🛾 4" (102mm) legs.
- Red wine thermostat.
- U White wine thermostat.
- Chocolate thermostat.
- Barrel lock (factory installed).
- Additional shelving.
- □ 1 ¼" (32 mm) pricing strips.

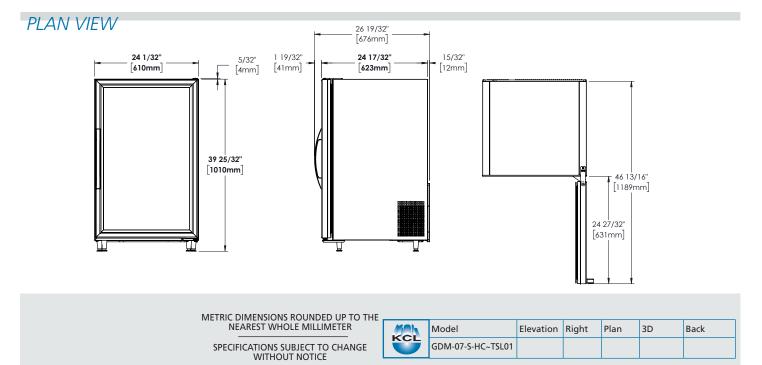

TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com