Fax (636)272-2408 • Toll Fr	TRUE MANUFACTURING CO., INC. © U.S.A. FOODSERVICE DIVISION (Fallon, Missouri 63366-4434 • (636)240-2400 ee (800)325-6152 • Intl Fax# (001)636-272-7546 arts Dept. Fax# (636)272-9471 • www.truemfg.com	Project Name: Location: Item #: Model #:	Qty:	AIA # SIS #
Model:	Food Pren Table			

TFP-48-18M

Food Prep Table: Food Prep Unit



TFP-48-18M

- True's food prep units are designed with enduring quality that protects your long term investment.
- Energy saving, environmentally friendly (R513A), exclusive forced-air refrigeration system holds 33°F to 41°F (.5°C to 5°C).
- All stainless steel front, top and ends. Corrosion resistant GalFan coated steel back.
- Interior attractive, clear coated aluminum liner.
 Stainless steel floor with coved corners.
- 8" (204 mm) deep, ½" (13 mm) thick, full length removable cutting board included. Sanitary, high density white polyethylene provides tough preparation surface.
- Door fitted with 12" (305 mm) long recessed handle that is foamed-in-place with a sheet metal interlock to ensure permanent attachment.
- Foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest ¹/₂" (millimeters rounded up to next whole number).

			Pans	Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	Shelves	(top)	W	D†	H*	HP	Voltage	Amps	Config.	(total m)	(kg)
TFP-48-18M	2	4	18	481/8	31½	45¾	1⁄5	115/60/1	2.9	5-15P	7	380
				1223	801	1162	N/A		N/A		2.13	173

+ Depth does not include 2" (51 mm) for cutting board.

* Height does not include ¾" (19 mm) for castors.	R-	Height	does	not	includ	e ¾"	(19	mm)	for	castors	•
---	----	--------	------	-----	--------	------	-----	-----	-----	---------	---

			AVAILABLE AT:
2/22	Printed in U.S.A.		

Model:

TFP-48-18M

STANDARD FEATURES

DESIGN

• True's commitment to using the highest guality materials and oversized refrigeration systems provides the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) R513A refrigerant.
- Energy saving, factory balanced refrigeration system with guided airflow to provide uniform temperature in food pans and cabinet interior.
- Exclusive forced-air design holds 33°F to 41°F (.5°C to 5°C) product temperature in food pans and cabinet interior. Complies with and listed under ANSI/NSF-7.
- High efficiency evaporator fan motor and larger fan blades give True Food Prep units a more efficient, low velocity, high volume airflow design.
- Easy access to all condensing unit components from back of cabinet.

CABINET CONSTRUCTION

- Exterior stainless steel front, top and ends. Corrosion resistant GalFan coated steel back.
- Interior attractive, clear coated aluminum liner. Stainless steel floor with coved corners

- Insulation entire cabinet structure and drawer facings are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 2¹/₂" (64 mm) diameter castors locks provided on front set.
- Solid State Electronic Control, accessible on back of the unit.

DOORS

Food Prep Table:

Food Prep Unit

- Stainless steel exterior with clear aluminum liner to match cabinet interior.
- Door fitted with 12" (305 mm) long recessed handle that is foamed-in-place with a sheet metal interlock to ensure permanent attachment.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Four (4) adjustable, heavy duty PVC coated wire shelves 21 1/5 "L x 20"D (547 mm x 508 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on 1/2" (13 mm) increments.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- 8" (204 mm) deep, full length removable cutting board. Sanitary, high-density white polyethylene provides tough preparation surface.

- Stainless steel, patented, foam insulated lid and hood keep pan temperatures colder, lock in freshness and minimize condensation. Removable for easy cleaning.
- Comes standard with 18 (% size) 6 % "L x 6¼"W x 4"D (175 mm x 159 mm x 102 mm) clear polycarbonate food pans in countertop prep area.
- Countertop pan opening designed to fit varying size pan configurations with available pan divider bars. Varying size pans supplied by others.
- NSF/ANSI Standard 7 compliant for open food product.

ELECTRICAL


Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply. Pan dividers

- Single overshelf
- Double overshelf

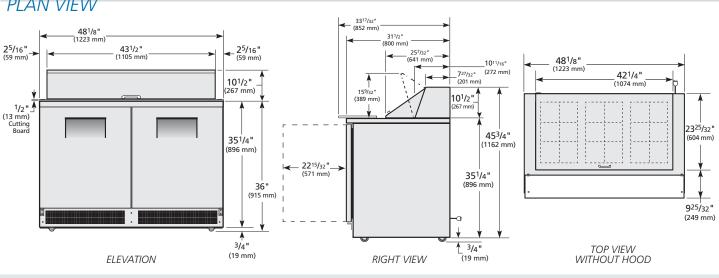

METRIC DIMENSIONS ROUNDED UP TO NEAREST WHOLE MILLIMETER SPECIFICATIONS SUBJECT TO CHAN WITHOUT NOTICE

O THE						
•	Model	Elevation	Right	Plan	3D	Back
GE	TFP-48-18M					

TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com

PLAN VIEW



