2001 East Terra Lane • (Fax (636)272-2408 • Toll F	TRUE MANUFACTURING CO., INC. (a) U.S.A. FOODSERVICE DIVISION (b) VFallon, Missouri 63366-4434 • (636)240-2400 (c) (636)225-6152 • Intl Fax# (001)636-272-7546 (c) (c) (c) (c) (c) (c) (c) (c) (c) (c)	Project Name: _ Location: Item #: Model #:		AIA # SIS #
Model: TFP-64-24M-D-4	Food Prep Table: Drawered Food Prep Unit			
			TFP-64-24M-D)-4
			True's food prep units are designed with enduring q that protects your long ter investment.	
		T	Energy saving, environme friendly (R513A), exclusive air refrigeration system ho to 41°F (.5°C to 5°C).	e forced-

- All stainless steel front, top and ends. Corrosion resistant GalFan coated steel back.
- Interior attractive, clear coated aluminum liner. Stainless steel floor with coved corners.
- 8" (204 mm) deep, ½" (13 mm) thick, full length removable cutting board included. Sanitary, high density white polyethylene provides tough preparation surface.
- Each drawer accommodates two (2) full size 12"L x 20"W x 6"D (305 mm x 508 mm x 153 mm) food pan (sold separately). Drawer will support varying size pan configurations with available pan divider bars (drawer pans sold separately).
- Heavy-duty stainless steel drawer slides and rollers.
- Foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest ½" (millimeters rounded up to next whole number).

		Pans		et Dime (inches (mm)	nsions)				NEMA	Cord Length (total ft.)	Crated Weight (lbs.)
Model	Drawers	(top)	W	D†	H*	HP	Voltage	Amps	Config.	(total m)	(kg)
TFP-64-24M-D-4	4	24	641⁄8	31½	45¾	1⁄3	115/60/1	4.8	5-15P	7	570
			1629	801	1162	N/A		N/A		2.13	259

+ Depth does not include 2" (51 mm) for cutting board.

·····	* Height does not include ¾" (19	9 mm) for castors.
-------	----------------------------------	--------------------

		APPROVALS:	AVAILABLE AT:
2/22	Printed in U.S.A.		

Model:

TFP-64-24M-D-4

Food Prep Table: Drawered Food Prep Unit

STANDARD FEATURES

DESIGN

• True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

REFRIGERATION SYSTEM

- · Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) R513A refrigerant.
- Energy saving, factory balanced refrigeration system with guided airflow to provide uniform temperature in food pans and cabinet interior.
- Exclusive forced-air design holds 33°F to 41°F (.5°C to 5°C) product temperature in food pans and cabinet interior. Complies with and listed under ANSI/NSF-7.
- High efficiency evaporator fan motor and larger fan blades give True Food Prep units a more efficient, low velocity, high volume airflow design.
- Easy access to all condensing unit components from back of cabinet.

CABINET CONSTRUCTION

- Exterior stainless steel front, top and ends. Corrosion resistant GalFan coated steel back.
- Interior attractive, clear coated aluminum liner. Stainless steel floor with coved corners.

- Insulation entire cabinet structure and drawer facings are foamed-in-place using a high density, polyure thane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 2¹/₂" (64 mm) diameter castors locks provided on front set.
- Solid State Electronic Control, accessible on back of the unit.

DRAWERS

- Stainless steel exterior drawer facings and liners. Stainless steel drawer frames.
- Each drawer fitted with 12" (305 mm) long . recessed handle that is foamed-in-place with a sheet metal interlock to ensure permanent attachment.
- Magnetic drawer gaskets of one piece construction, removable without tools for ease of cleaning.
- Heavy-duty stainless steel drawer slides and rollers. Removable without tools for easy cleaning.
- Each drawer accommodates two (2) full size 12"L x 20"W x 6"D (305 mm x 508 mm x 153 mm) food pan (sold separately). Drawer will support varying size pan configurations with available pan divider bars (drawer pans sold separately).

MODEL FEATURES

 Evaporator is epoxy coated to eliminate the potential of corrosion.

• 8" (204 mm) deep, full length removable cutting board. Sanitary, high-density white polyethylene provides tough preparation surface.

True

- Stainless steel, patented, foam insulated lid and hood keep pan temperatures colder, lock in freshness and minimize condensation. Removable for easy cleaning.
- Comes standard with 24 (1% size) 67% "L x 6 ¼ "W x 4"D (175 mm x 159 mm x 102 mm) clear polycarbonate, food pans in countertop prep area.
- Countertop pan opening designed to fit varying size pan configurations with available pan divider bars. Varving size pans supplied by others.
- NSF/ANSI Standard 7 compliant for open food product.

ELECTRICAL


· Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply. Pan dividers

- □ Single overshelf
- Double overshelf

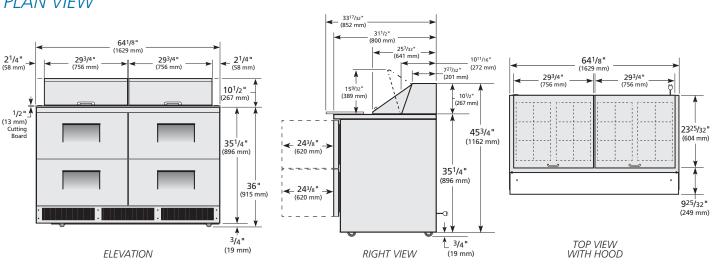

METRIC DIMENSIONS ROUNDED UP TO NEAREST WHOLE MILLIMETER SPECIFICATIONS SUBJECT TO CHANG WITHOUT NOTICE

THE							
		Model	Elevation	Right	Plan	3D	Back
GE	KCL	TFP-64-24M-D-4					

TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com

PLAN VIEW